

SECTION 1: Identification

1.1. Identification

Product form : Mixtures
Product name : PA-2020

1.2. Recommended use and restrictions on use

Use of the substance/mixture : Paraffin Control Compound

1.3. Supplier

Chemical Consultants Inc.
1600 Ratcliff Drive
Gillette, WY 82716 - United States
T 307-686-2141 - F 307-686-1106
www.chemicalconsultants.com

1.4. Emergency telephone number

Emergency number : INFOTRAC 1-800-424-5571

SECTION 2: Hazard(s) identification

2.1. Classification of the substance or mixture

GHS-US classification


Flammable liquids	H226	Flammable liquid and vapor
Category 3		
Acute toxicity (oral)	H302	Harmful if swallowed
Category 4		
Acute toxicity (dermal)	H312	Harmful in contact with skin
Category 4		
Acute toxicity (inhalation:vapour)	H332	Harmful if inhaled
Category 4		
Skin corrosion/irritation	H314	Causes severe skin burns and eye damage
Category 1A		
Carcinogenicity Category 1A	H350	May cause cancer (Dermal, Inhalation, oral)
Specific target organ toxicity (single exposure) Category 1	H370	Causes damage to organs (eyes, respiratory tract, Skin) (Dermal, Inhalation, oral)

Full text of H statements : see section 16

2.2. GHS Label elements, including precautionary statements

GHS-US labeling

Hazard pictograms (GHS-US) :

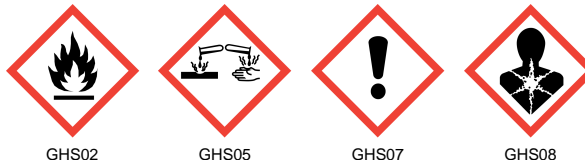

Signal word (GHS-US) :

: Danger

Hazard statements (GHS-US) :

: H226 - Flammable liquid and vapor
H302+H312+H332 - Harmful if swallowed, in contact with skin or if inhaled
H314 - Causes severe skin burns and eye damage
H350 - May cause cancer (Dermal, Inhalation, oral)
H370 - Causes damage to organs (eyes, respiratory tract, Skin) (Dermal, Inhalation, oral)

Precautionary statements (GHS-US) :

: P201 - Obtain special instructions before use
P202 - Do not handle until all safety precautions have been read and understood
P210 - Keep away from open flames. - No smoking
P233 - Keep container tightly closed
P240 - Ground/Bond container and receiving equipment
P241 - Use explosion-proof electrical equipment
P242 - Use only non-sparking tools
P243 - Take precautionary measures against static discharge

PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P260 - Do not breathe fume, vapors
P261 - Avoid breathing fume, vapors
P264 - Wash hands thoroughly after handling
P270 - Do not eat, drink or smoke when using this product
P271 - Use only outdoors or in a well-ventilated area
P280 - Wear eye protection, protective gloves
P301+P312 - If swallowed: Call a POISON CENTER if you feel unwell
P301+P330+P331 - If swallowed: rinse mouth. Do NOT induce vomiting
P302+P352 - If on skin: Wash with plenty of water
P303+P361+P353 - If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
P304+P340 - If inhaled: Remove person to fresh air and keep comfortable for breathing
P305+P351+P338 - If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
P307+P311 - If exposed: Call a poison center/doctor
P308+P313 - If exposed or concerned: Get medical advice/attention
P310 - Immediately call a POISON CENTER
P312 - Call a POISON CENTER if you feel unwell
P321 - Specific treatment (see a POISON CENTER, First aid measures on this label)
P322 - Specific treatment (see First aid measures on this label)
P330 - Rinse mouth
P362+P364 - Take off contaminated clothing and wash it before reuse
P363 - Wash contaminated clothing before reuse
P370+P378 - In case of fire: Use carbon dioxide (CO₂), dry extinguishing powder, foam to extinguish
P403+P235 - Store in a well-ventilated place. Keep cool
P405 - Store locked up
P501 - Dispose of contents/container to a licensed hazardous-waste disposal contractor or collection site except for empty clean containers which can be disposed of as non-hazardous waste

2.3. Other hazards which do not result in classification

No additional information available

2.4. Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/Information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

Name	Product identifier	%	GHS-US classification
Methanol	(CAS No) 67-56-1	<10	Flam. Liq. 2, H225 Acute Tox. 3 (Oral), H301 Acute Tox. 3 (Dermal), H311 Acute Tox. 3 (Inhalation:vapour), H331 STOT SE 1, H370
butyl glycolether	(CAS No) 111-76-2	<10	Flam. Liq. 4, H227 Acute Tox. 4 (Oral), H302 Acute Tox. 3 (Dermal), H311 Acute Tox. 4 (Inhalation:dust,mist), H332 Skin Irrit. 2, H315
dodecylbenzenesulphonic acid	(CAS No) 27176-87-0	<4	Acute Tox. 4 (Oral), H302 Skin Corr. 1A, H314
sulfuric acid	(CAS No) 7664-93-9	<0.5	Skin Corr. 1A, H314 Carc. 1A, H350

Full text of hazard classes and H-statements : see section 16

SECTION 4: First-aid measures

4.1. Description of first aid measures

- | | |
|---------------------------------------|--|
| First-aid measures general | : Call a physician immediately. |
| First-aid measures after inhalation | : Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor/physician if you feel unwell. |
| First-aid measures after skin contact | : Rinse skin with water/shower. Remove/Take off immediately all contaminated clothing. Call a physician immediately. |
| First-aid measures after eye contact | : Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician immediately. |

PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

First-aid measures after ingestion : Rinse mouth. Do not induce vomiting. Call a physician immediately.

4.2. Most important symptoms and effects (acute and delayed)

Symptoms/injuries after skin contact : Burns.
Symptoms/injuries after eye contact : Serious damage to eyes.
Symptoms/injuries after ingestion : Burns.

4.3. Immediate medical attention and special treatment, if necessary

Treat symptomatically.

SECTION 5: Fire-fighting measures

5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Water spray. Dry powder. Foam. Carbon dioxide.

5.2. Specific hazards arising from the chemical

Fire hazard : Flammable liquid and vapor.
Reactivity : Flammable liquid and vapor.

5.3. Special protective equipment and precautions for fire-fighters

Protection during firefighting : Do not attempt to take action without suitable protective equipment. Self-contained breathing apparatus. Complete protective clothing.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

Emergency procedures : No open flames, no sparks, and no smoking. Only qualified personnel equipped with suitable protective equipment may intervene. Do not breathe dust/fume/gas/mist/vapors/spray.

6.1.2. For emergency responders

Protective equipment : Do not attempt to take action without suitable protective equipment. For further information refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

Avoid release to the environment. Notify authorities if product enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up : Take up liquid spill into absorbent material. Notify authorities if product enters sewers or public waters.
Other information : Dispose of materials or solid residues at an authorized site.

6.4. Reference to other sections

For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Ensure good ventilation of the work station. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Ground/bond container and receiving equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Flammable vapors may accumulate in the container. Use explosion-proof equipment. Wear personal protective equipment. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Take all necessary technical measures to avoid or minimize the release of the product on the workplace. Limit quantities of product at the minimum necessary for handling and limit the number of exposed workers. Provide local exhaust or general room ventilation. Floors, walls and other surfaces in the hazard area must be cleaned regularly. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get in eyes, on skin, or on clothing.

Hygiene measures : Separate working clothes from town clothes. Launder separately. Wash contaminated clothing before reuse. Do not eat, drink or smoke when using this product. Always wash hands after handling the product.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Ground/bond container and receiving equipment.
Storage conditions : Store in a well-ventilated place. Keep cool. Keep container tightly closed. Store locked up.

SECTION 8: Exposure controls/personal protection**8.1. Control parameters**

Methanol (67-56-1)		
ACGIH	ACGIH TWA (ppm)	200 ppm (Methanol; USA; Time-weighted average exposure limit 8 h; TLV - Adopted Value)
ACGIH	ACGIH STEL (ppm)	250 ppm (Methanol; USA; Short time value; TLV - Adopted Value)
ACGIH	Remark (ACGIH)	Headache; eye dam; dizziness; nausea
OSHA	OSHA PEL (TWA) (mg/m ³)	260 mg/m ³
OSHA	OSHA PEL (TWA) (ppm)	200 ppm
butyl glycolether (111-76-2)		
ACGIH	ACGIH TWA (ppm)	20 ppm (2-Butoxyethanol (EGBE); USA; Time-weighted average exposure limit 8 h; TLV - Adopted Value)
ACGIH	Remark (ACGIH)	Eye & URT irr
OSHA	OSHA PEL (TWA) (mg/m ³)	240 mg/m ³
OSHA	OSHA PEL (TWA) (ppm)	50 ppm
dodecylbenzenesulphonic acid (27176-87-0)		
Not applicable		
sulfuric acid (7664-93-9)		
ACGIH	ACGIH TWA (mg/m ³)	0.2 mg/m ³ (Sulfuric acid; USA; Time-weighted average exposure limit 8 h; TLV - Adopted Value; Thoracic fraction)
ACGIH	Remark (ACGIH)	Pulm func
OSHA	OSHA PEL (TWA) (mg/m ³)	1 mg/m ³

8.2. Appropriate engineering controls

- Appropriate engineering controls : Ensure good ventilation of the work station.
 Environmental exposure controls : Avoid release to the environment.

8.3. Individual protection measures/Personal protective equipment**Personal protective equipment:**

Gloves. Protective goggles.

Hand protection:

Protective gloves

Eye protection:

Chemical goggles or face shield. Safety glasses

Skin and body protection:

Wear suitable protective clothing

Respiratory protection:

Wear respiratory protection



PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state	: Liquid
Color	: Colorless
Odor	: mild
Odor threshold	: No data available
pH	: 1.21
Melting point	: Not applicable
Freezing point	: No data available
Boiling point	: 189 °F
Flash point	: 117 °F
Relative evaporation rate (butyl acetate=1)	: No data available
Flammability (solid, gas)	: Not applicable.
Vapor pressure	: 1.3 psi
Relative vapor density at 20 °C	: No data available
Relative density	: No data available
Specific gravity / density	: 1.01 @ 60° F
Solubility	: No data available
Log Pow	: No data available
Auto-ignition temperature	: No data available
Decomposition temperature	: No data available
Viscosity, kinematic	: 13.3 cSt @ 60° F
Viscosity, dynamic	: No data available
Explosion limits	: No data available
Explosive properties	: No data available
Oxidizing properties	: No data available

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

Flammable liquid and vapor.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

No dangerous reactions known under normal conditions of use.

10.4. Conditions to avoid

Avoid contact with hot surfaces. Heat. No flames, no sparks. Eliminate all sources of ignition.

10.5. Incompatible materials

Oxidizing agent.

10.6. Hazardous decomposition products

Under normal conditions of storage and use, hazardous decomposition products should not be produced.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Oral: Harmful if swallowed. Dermal: Harmful in contact with skin. Inhalation:vapour: Harmful if inhaled.

PA-2020	
ATE US (oral)	871.547 mg/kg body weight
ATE US (dermal)	1921.946 mg/kg body weight
ATE US (vapors)	13.837 mg/l/4h

Methanol (67-56-1)	
LD50 oral rat	> 5000 mg/kg (Rat; BASF test; Literature study; 1187-2769 mg/kg bodyweight; Rat; Weight of evidence)
LD50 dermal rabbit	15800 mg/kg (Rabbit; Literature study)
LC50 inhalation rat (mg/l)	85 mg/l/4h (Rat; Literature study)
LC50 inhalation rat (ppm)	64000 ppm/4h (Rat; Literature study)
ATE US (oral)	100.000 mg/kg body weight
ATE US (dermal)	300.000 mg/kg body weight
ATE US (gases)	64000.000 ppmV/4h
ATE US (vapors)	3.000 mg/l/4h
ATE US (dust, mist)	85.000 mg/l/4h

butyl glycolether (111-76-2)	
LD50 dermal rat	> 2000 mg/kg body weight (Rat; Experimental value; OECD 402: Acute Dermal Toxicity)
LD50 dermal rabbit	435 mg/kg body weight (Rabbit; Experimental value; OECD 402: Acute Dermal Toxicity; 435 mg/kg bodyweight; Rabbit; Weight of evidence; Equivalent or similar to OECD 402)
LC50 inhalation rat (mg/l)	2.17 mg/l/4h (Rat; Experimental value; 2.35 mg/l/4h; Rat; Experimental value)
LC50 inhalation rat (ppm)	450-486,Rat; Weight of evidence
ATE US (oral)	500.000 mg/kg body weight
ATE US (dermal)	435.000 mg/kg body weight
ATE US (vapors)	2.170 mg/l/4h
ATE US (dust, mist)	2.170 mg/l/4h

dodecylbenzenesulphonic acid (27176-87-0)	
LD50 oral rat	650 mg/kg (Rat; Literature study)
ATE US (oral)	650.000 mg/kg body weight

sulfuric acid (7664-93-9)	
LD50 oral rat	2140 mg/kg body weight (Rat; Experimental value)
ATE US (oral)	2140.000 mg/kg body weight

Skin corrosion/irritation	: Causes severe skin burns and eye damage. pH: 1.21
Serious eye damage/irritation	: Not classified pH: 1.21
Respiratory or skin sensitization	: Not classified
Germ cell mutagenicity	: Not classified
Carcinogenicity	: May cause cancer (Dermal, Inhalation, oral).

butyl glycolether (111-76-2)	
IARC group	3 - Not classifiable

sulfuric acid (7664-93-9)	
IARC group	1 - Carcinogenic to humans
National Toxicology Program (NTP) Status	2 - Known Human Carcinogens

Reproductive toxicity	: Not classified
STOT-single exposure	: Causes damage to organs (eyes, respiratory tract, Skin) (Dermal, Inhalation, oral).
STOT-repeated exposure	: Not classified
Aspiration hazard	: Not classified
Symptoms/injuries after skin contact	: Burns.
Symptoms/injuries after eye contact	: Serious damage to eyes.
Symptoms/injuries after ingestion	: Burns.

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general	: Before neutralisation, the product may represent a danger to aquatic organisms.
-------------------	---

Methanol (67-56-1)	
LC50 fish 1	15400 mg/l (LC50; EPA 660/3 - 75/009; 96 h; Lepomis macrochirus; Flow-through system; Fresh water; Experimental value)
EC50 Daphnia 1	> 10000 mg/l (EC50; DIN 38412-11; 48 h; Daphnia magna; Static system; Fresh water; Experimental value)
LC50 fish 2	10800 mg/l (LC50; 96 h; Salmo gairdneri)

dodecylbenzenesulphonic acid (27176-87-0)	
Threshold limit algae 2	127.9 mg/l (ErC50; Other; 72 h; Scenedesmus subspicatus; Static system)

sulfuric acid (7664-93-9)	
LC50 fish 1	42 mg/l (LC50; 96 h)
EC50 Daphnia 1	29 mg/l (EC50; 24 h)

12.2. Persistence and degradability

Methanol (67-56-1)	
Persistence and degradability	Readily biodegradable in water. Biodegradable in the soil. Highly mobile in soil.
Biochemical oxygen demand (BOD)	0.6 - 1.12 g O ₂ /g substance
Chemical oxygen demand (COD)	1.42 g O ₂ /g substance
ThOD	1.5 g O ₂ /g substance
BOD (% of ThOD)	0.8 (Literature study)

butyl glycolether (111-76-2)	
Persistence and degradability	Readily biodegradable in water. Biodegradable in the soil. Photodegradation in the air.
Biochemical oxygen demand (BOD)	0.71 g O ₂ /g substance
Chemical oxygen demand (COD)	2.2 g O ₂ /g substance
ThOD	2.305 g O ₂ /g substance
BOD (% of ThOD)	0.31

dodecylbenzenesulphonic acid (27176-87-0)	
Persistence and degradability	Readily biodegradable in water. Low potential for adsorption in soil.
Chemical oxygen demand (COD)	2.41 g O ₂ /g substance

sulfuric acid (7664-93-9)	
Persistence and degradability	Biodegradability: not applicable.
Biochemical oxygen demand (BOD)	Not applicable
Chemical oxygen demand (COD)	Not applicable
ThOD	Not applicable

12.3. Bioaccumulative potential

Methanol (67-56-1)	
BCF fish 1	< 10 (BCF; 72 h; Leuciscus idus)
Log Pow	-0.77 (Experimental value; Other)
Bioaccumulative potential	Low potential for bioaccumulation (BCF < 500).

butyl glycolether (111-76-2)	
Log Pow	0.81 (Experimental value; BASF test; 25 °C)
Bioaccumulative potential	Low potential for bioaccumulation (Log Kow < 4).

dodecylbenzenesulphonic acid (27176-87-0)	
Log Pow	1.96
Bioaccumulative potential	Low potential for bioaccumulation (Log Kow < 4).

sulfuric acid (7664-93-9)	
Log Pow	-2.2 (Estimated value)
Bioaccumulative potential	Bioaccumulation: not applicable.

12.4. Mobility in soil

PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Methanol (67-56-1)	
Surface tension	0.023 N/m (20 °C)
Log Koc	Koc,PCKOCWIN v1.66; 1; Calculated value
butyl glycoether (111-76-2)	
Surface tension	0.027 N/m (25 °C)
dodecylbenzenesulphonic acid (27176-87-0)	
Surface tension	35 N/m (25 °C; 800 mg/l)

12.5. Other adverse effects

Effect on the global warming : No known effects from this product.
GWPmix comment : No known effects from this product.

SECTION 13: Disposal considerations

13.1. Disposal methods

Waste treatment methods : Dispose of contents/container in accordance with licensed collector's sorting instructions.
Additional information : Flammable vapors may accumulate in the container.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Transport document description : UN1993, Flammable liquids, n.o.s., 3, II
UN-No.(DOT) : UN1993
Proper Shipping Name (DOT) : Flammable liquids, n.o.s.
Class (DOT) : 3 - Class 3 - Flammable and combustible liquid 49 CFR 173.120
Packing group (DOT) : II - Medium Danger
Hazard labels (DOT) : 3 - Flammable liquid



DOT Packaging Non Bulk (49 CFR 173.xxx) : 202
DOT Packaging Bulk (49 CFR 173.xxx) : 242
DOT Symbols : G - Identifies PSN requiring a technical name
DOT Special Provisions (49 CFR 172.102) : IB2 - Authorized IBCs: Metal (31A, 31B and 31N); Rigid plastics (31H1 and 31H2); Composite (31HZ1). Additional Requirement: Only liquids with a vapor pressure less than or equal to 110 kPa at 50 °C (1.1 bar at 122 °F), or 130 kPa at 55 °C (1.3 bar at 131 °F) are authorized.
T7 - 4 178.274(d)(2) Normal..... 178.275(d)(3)
TP1 - The maximum degree of filling must not exceed the degree of filling determined by the following: Degree of filling = $97 / 1 + a (tr - tf)$ Where: tr is the maximum mean bulk temperature during transport, and tf is the temperature in degrees celsius of the liquid during filling.
TP8 - A portable tank having a minimum test pressure of 1.5 bar (150 kPa) may be used when the flash point of the hazardous material transported is greater than 0 °C (32 °F).
TP28 - A portable tank having a minimum test pressure of 2.65 bar (265 kPa) may be used provided the calculated test pressure is 2.65 bar or less based on the MAWP of the hazardous material, as defined in 178.275 of this subchapter, where the test pressure is 1.5 times the MAWP.
DOT Packaging Exceptions (49 CFR 173.xxx) : 150
DOT Quantity Limitations Passenger aircraft/rail (49 CFR 173.27) : 5 L
DOT Quantity Limitations Cargo aircraft only (49 CFR 175.75) : 60 L

PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

DOT Vessel Stowage Location	: B - (i) The material may be stowed "on deck" or "under deck" on a cargo vessel and on a passenger vessel carrying a number of passengers limited to not more than the larger of 25 passengers, or one passenger per each 3 m of overall vessel length; and (ii) "On deck only" on passenger vessels in which the number of passengers specified in paragraph (k)(2)(i) of this section is exceeded.
Emergency Response Guide (ERG) Number	: 128
Other information	: No supplementary information available.

Transportation of Dangerous Goods

Transport by sea

Transport document description (IMDG)	: UN 1993 FLAMMABLE LIQUID, N.O.S., 3, II
UN-No. (IMDG)	: 1993
Proper Shipping Name (IMDG)	: FLAMMABLE LIQUID, N.O.S.
Class (IMDG)	: 3 - Flammable liquids
Packing group (IMDG)	: II - substances presenting medium danger
Limited quantities (IMDG)	: 1 L

Air transport

Transport document description (IATA)	: UN 1993 Flammable liquid, n.o.s., 3, II
UN-No. (IATA)	: 1993
Proper Shipping Name (IATA)	: Flammable liquid, n.o.s.
Class (IATA)	: 3 - Flammable Liquids
Packing group (IATA)	: II - Medium Danger

SECTION 15: Regulatory information

15.1. US Federal regulations

Methanol (67-56-1)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory Subject to reporting requirements of United States SARA Section 313	
CERCLA RQ	5000 lb
butyl glycolether (111-76-2)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory	
dodecylbenzenesulphonic acid (27176-87-0)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory Not subject to reporting requirements of the United States SARA Section 313	
CERCLA RQ	1000 lb
sulfuric acid (7664-93-9)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory Not subject to reporting requirements of the United States SARA Section 313 Subject to reporting requirements of United States SARA Section 313	
CERCLA RQ	1000 lb
SARA Section 302 Threshold Planning Quantity (TPQ)	1000 lb

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

National regulations

sulfuric acid (7664-93-9)

Listed on IARC (International Agency for Research on Cancer)
Listed as carcinogen on NTP (National Toxicology Program)

15.3. US State regulations

Methanol (67-56-1)

U.S. - California - Proposition 65 - Carcinogens List	U.S. - California - Proposition 65 - Developmental Toxicity	U.S. - California - Proposition 65 - Reproductive Toxicity - Female	U.S. - California - Proposition 65 - Reproductive Toxicity - Male	No significant risk level (NSRL)
No	Yes	No	No	

Methanol (67-56-1)

U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - Pennsylvania - RTK (Right to Know) List

butyl glycolether (111-76-2)

U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - Pennsylvania - RTK (Right to Know) List

dodecylbenzenesulphonic acid (27176-87-0)

U.S. - Massachusetts - Right To Know List
U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - Pennsylvania - RTK (Right to Know) List

sulfuric acid (7664-93-9)

U.S. - Massachusetts - Right To Know List
U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - Pennsylvania - RTK (Right to Know) List

SECTION 16: Other information

Revision date : 02/13/2017

Full text of H-phrases:


H225	Highly flammable liquid and vapor
H226	Flammable liquid and vapor
H227	Combustible liquid
H301	Toxic if swallowed
H302	Harmful if swallowed
H311	Toxic in contact with skin
H312	Harmful in contact with skin
H314	Causes severe skin burns and eye damage
H315	Causes skin irritation
H331	Toxic if inhaled
H332	Harmful if inhaled
H350	May cause cancer
H370	Causes damage to organs

PA-2020

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

NFPA health hazard	: 2 - Materials that, under emergency conditions, can cause temporary incapacitation or residual injury.
NFPA fire hazard	: 2 - Materials that must be moderately heated or exposed to relatively high ambient temperatures before ignition can occur.
NFPA reactivity	: 0 - Material that in themselves are normally stable, even under fire conditions.
HMIS III Rating	
Health	: 2 Moderate Hazard - Temporary or minor injury may occur
Flammability	: 2 Moderate Hazard - Materials which must be moderately heated or exposed to high ambient temperatures before ignition will occur. Includes liquids having a flash point at or above 100 F but below 200 F. (Classes II & IIIA)
Physical	: 0 Minimal Hazard - Materials that are normally stable, even under fire conditions, and will NOT react with water, polymerize, decompose, condense, or self-react. Non-Explosives.
Personal protection	: n,p n - Splash goggles p - Gloves



SDS US (GHS HazCom 2012)

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product